





ENVELOPE / ASSEMBLY DRAWING

008974

SPECIFICATION CONTROL DRAWING	REV	DESCRIPTION	DWN	DATE	APPROVED
	A	ENGINEERING RELEASE	KMM	3/6/99	R. RICE

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES, LTD. ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED. ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

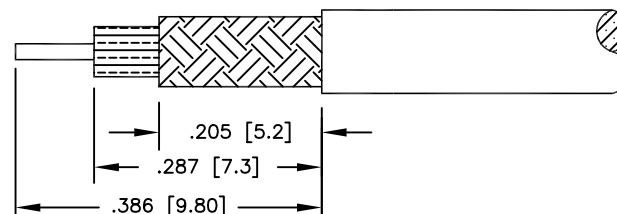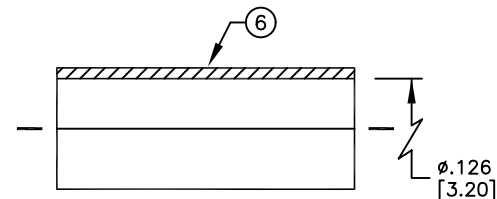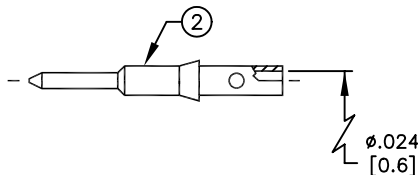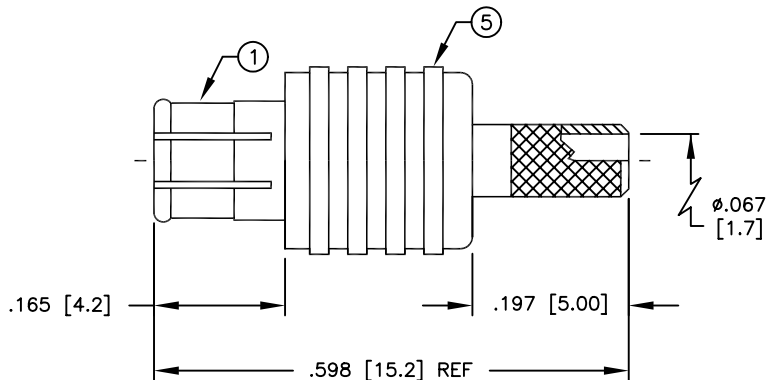

SUGGESTED STRIPPING INSTRUCTIONS
SUGGESTED CRIMP DIES: .130
PIN TO BE SOLDERED

SPECIFICATIONS:

IMPEDANCE: 50 OHMS
 WORKING VOLTAGE: 335 VRMS @ SEA LEVEL
 FREQUENCY RANGE: 0-6 GHz
 INSERTION LOSS: -.1 dB MAX @ 1 GHz
 VSWR MAX: 1.3:1 @ 6 GHz
 FOR RG-316/U DOUBLE SHIELD CABLE

DIMENSIONS ARE IN INCHES AND [MILLIMETERS]

UNLESS OTHERWISE NOTED TOLERANCES ARE:

DECIMALS DIAMETER

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.

7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (619)549-6340
 (619)549-6345 FAX

RMX-8000-B1

MCX CRIMP PLUG

6	FERRULE [FER-1BKJ]	1	COPPER	NICKEL
5	HOUSING	1	BRASS	NICKEL
4	DIELECTRIC	1	TEFLON	NONE
3	DIELECTRIC	1	TEFLON	NONE
2	PIN	1	BRASS	GOLD
1	BODY	1	BeCu	NICKEL
ITEM	DESCRIPTION	QTY	MATERIAL	FINISH

DRAWN	K. MAXWELL	3/6/99
CHECKED		
ORJ DRAWN	K. MAXWELL	3/6/99
APPROVALS	DATE	

SIZE	CABLE GROUP	DWG NO.	REV
A	B1	9051	A
SCALE: 4 : 1		CAD FILE 13ARC B	SHEET 1 OF 1